

Inteligentny Naświetlacz LED 1-10V

AREA LED HD AR



Model	P	lm	K	Beam	V	CRI	PF	LM/W	Dimensions	kg
AREA LED HD AR 100 W	100 W	12500 lm	4000 K	145x100°	100-277V	> 80	> 0.9	125 lm/W	L332xW320xH95 mm	5.9 kg
AREA LED HD AR 150 W	150 W	18750 lm	4000 K	145x100°	100-277V	> 80	> 0.9	125 lm/W	L332xW320xH95 mm	6.4 kg
AREA LED HD AR 200 W	200 W	25000 lm	4000 K	145x100°	100-277V	> 80	> 0.9	125 lm/W	L332xW320xH95 mm	6.4 kg



MATERIAŁ

Obudowa: aluminium z powłoką elektrostatyczną
Dyfuzor: szkło hartowane

MONTAŻ

Mocowanie na ramce montażowej oraz regulowanym wysięgniku

ZASILANIE

Zasilacz: MEAN WELL ze sterowaniem 1-10V


ZASTOSOWANIE

Obiekty: przemysłowe
Oświetlenie zewnętrzne
Oświetlenie placów, boisk
Doświetlenie terenu

SYSTEMY DODATKOWE

Sterowanie 1-10V
DALI: elektroniczny układ sterowania
Konwerter 1-10V - DALI

FOTOMETRIA

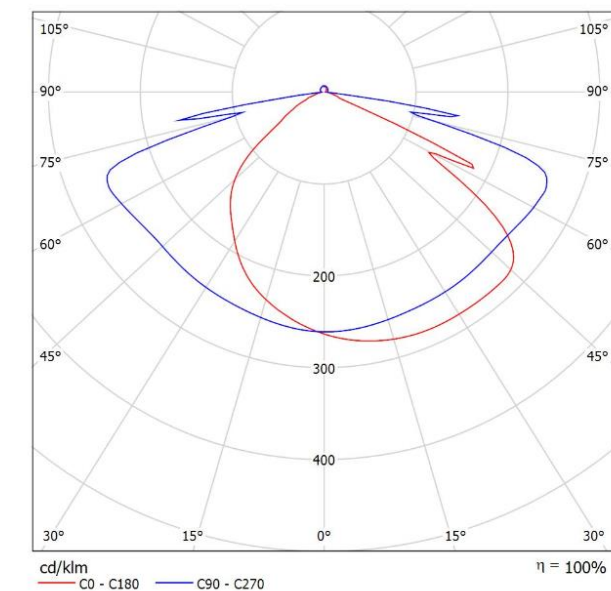

KONTAKT

Ledolux Poland Sp. z o.o.
 Rogoźnica 301
 36-060 Głogów Małopolski
 NIP: 8133074510
 KRS: 0000444766



tel. +48 17 741 20 00
 kom. +48 606 81 81 81
 info@ledolux.pl
 www.ledolux.pl