

Inteligentna lampa LED 1-10V

HD HL



AC LED



Model	P	lm	K	mm	V	CRI	PF	LM/W	QUANTITY	mm	kg
HD HL 90 W	90 W	9900 lm	5000 K	60x90	100-240 V	> 80	> 0.95	110 lm/W	84	600x80x80 mm	6 kg
HD HL 120 W	120 W	13200 lm	5000 K	60x90	100-240 V	> 80	> 0.95	110 lm/W	112	900x80x80 mm	7 kg
HD HL 150 W	150 W	16500 lm	5000 K	60x90	100-240 V	> 80	> 0.95	110 lm/W	140	1200x80x80 mm	8,6 kg



MATERIAŁ

Obudowa: aluminium
Dyfuzor: poliwęglan (PC)

ZASTOSOWANIE

Hale: produkcyjne, magazynowe
Centra: handlowe, logistyczne
Obiekty: przemysłowe

AKCESORIA

Czujniki: ruchu, oświetlenia, zmierzchu


MONTAŻ

Zwieszany: regulowane zwieszenie linkowe

ZASILANIE

Zasilacz: MEAN WELL ze sterowaniem 1-10V wewnątrz obudowy

FOTOMETRIA

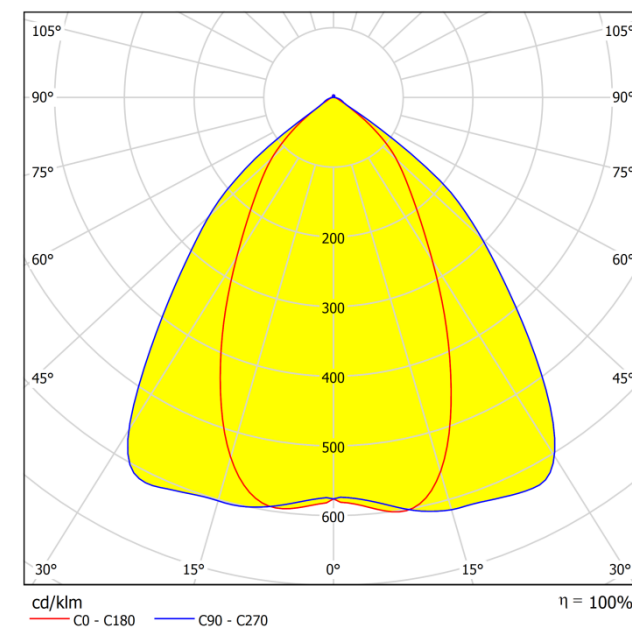

KONTAKT

Ledolux Poland Sp. z o.o.
Rogoźnica 301
36-060 Głogów Małopolski
NIP: 8133074510
KRS: 0000444766



tel. +48 17 741 20 00
kom. +48 606 81 81 81
info@ledoprojekt.pl
www.ledoprojekt.pl
www.ledolux.pl