

# Lampa uliczna LED

## PIKE S



SAMSUNG

ACLED

PHILIPS



Model	P	lm	K	Beam	V	CRI	PF	LM/W	Temp	Dimensions
PIKE S 120 W	120 W	12000 lm	3000 K 4000 K 5700 K	145x45	100-277V	> 75	> 0.95	100 lm/W	-25°C - 50°C	690x305x135 mm
PIKE S 150 W	150 W	15000 lm	3000 K 4000 K 5700 K	145x45	100-277V	> 75	> 0.95	100 lm/W	-25°C - 50°C	829x385x172 mm
PIKE S 200 W	200 W	20000 lm	3000 K 4000 K 5700 K	145x45	100-277V	> 75	> 0.95	100 lm/W	-25°C - 50°C	829x385x172 mm
PIKE S 240 W	240 W	24000 lm	3000 K 4000 K 5700 K	145x45	100-277V	> 75	> 0.95	100 lm/W	-25°C - 50°C	829x385x172 mm



### MATERIAŁ

**Obudowa:** odlewane aluminium  
**Dyfuzor:** szkło hartowane

### ZASILANIE

**Zasilacz:** w obudowie firmy PHILIPS


### MONTAŻ

**Montaż:** na słupie lub wysięgnikach

### ZASTOSOWANIE

**Drogi i ulice**  
**Obiekty:** przemysłowe  
**Oświetlenie zewnętrzne**

### FOTOMETRIA

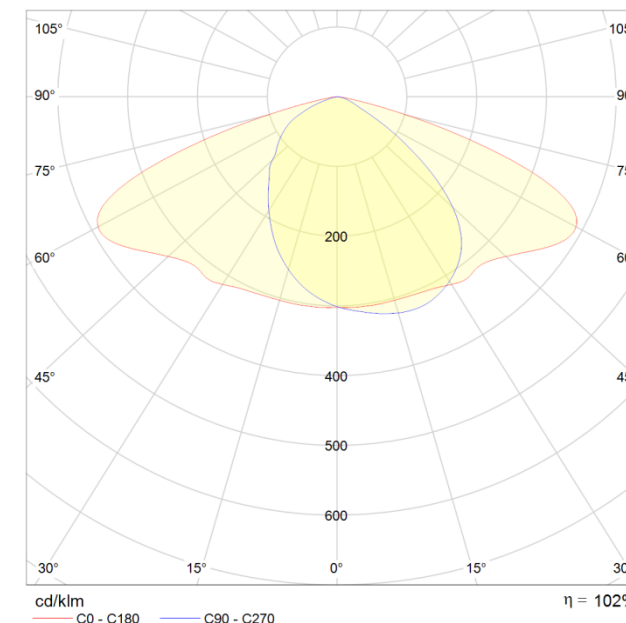

### KONTAKT

Ledolux Poland Sp. z o.o.  
Rogoźnica 301  
36-060 Głogów Małopolski  
NIP: 8133074510  
KRS: 0000444766



tel. +48 17 741 20 00  
kom. +48 606 81 81 81  
info@ledoprojekt.pl  
www.ledoprojekt.pl  
www.ledolux.pl